

# CP632SA 6V 3.2Ah(20hr)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

## Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

## Dimensions and Weight

Length(mm / inch)	67 / 2.64
Width(mm / inch)	34 / 1.34
Height(mm / inch)	118 / 4.65
Total Height(mm / inch)	124 / 4.88
Approx. Weight(Kg / lbs)	0.71 / 1.57

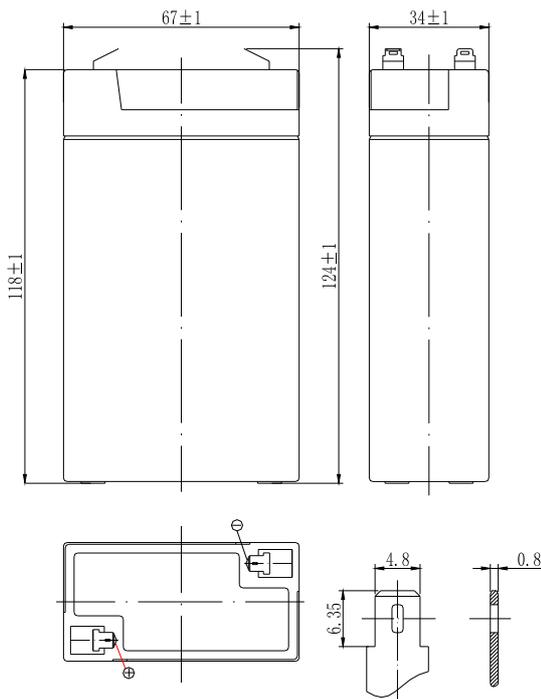

## Performance Characteristics









Nominal Voltage	6V
Number of cell	3
Design Life	3-5 years
Nominal Capacity 77°F(25°C)	
20 hour rate (0.16A, 5.25V)	3.2Ah
10 hour rate (0.31A, 5.25V)	3.1Ah
5 hour rate (0.58A, 5.25V)	2.9Ah
1 hour rate (2.12A, 4.8V)	2.12Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	34mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	48A(5s)
Short Circuit Current	160A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	7.25-7.45V
Maximum charging current	1.28A
Temperature compensation	-15mV/°C
Standby use	6.8-6.9V
Temperature compensation	-10mV/°C

## Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	13.1	8.87	6.15	3.72	2.12	0.92	0.63	0.33	0.17
1.65V	12.4	8.44	5.88	3.57	2.04	0.89	0.61	0.32	0.16
1.70V	11.7	8.01	5.60	3.41	1.96	0.86	0.60	0.32	0.16
1.75V	11.0	7.56	5.31	3.25	1.88	0.83	0.58	0.31	0.16
1.80V	10.3	7.10	5.01	3.08	1.79	0.79	0.56	0.30	0.16

## Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	21.0	14.0	10.90	6.54	4.97	3.85	2.56	1.83	1.24
1.65V	19.7	12.4	9.07	5.62	4.26	3.34	2.31	1.68	1.17
1.70V	18.4	12.4	9.67	5.96	4.50	3.52	2.40	1.73	1.19
1.75V	17.1	11.6	9.07	5.62	4.26	3.34	2.31	1.68	1.17
1.80V	15.8	10.8	8.47	5.27	4.01	3.16	2.21	1.62	1.14

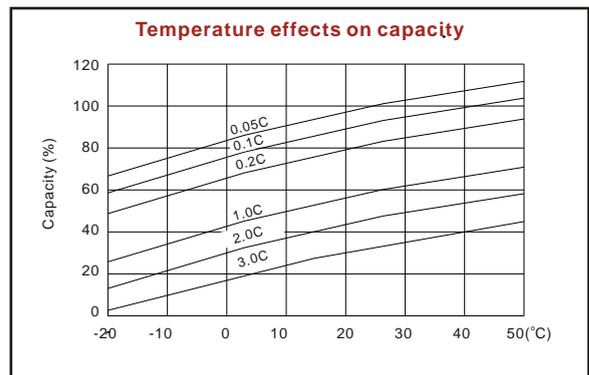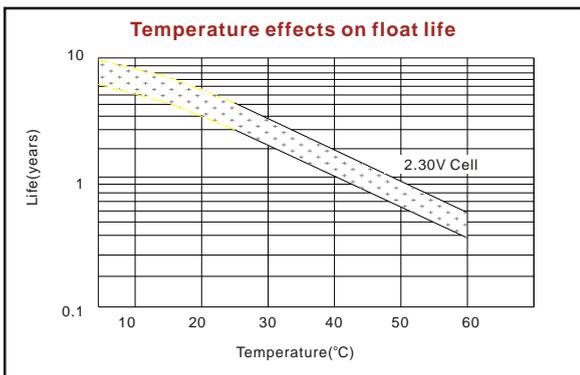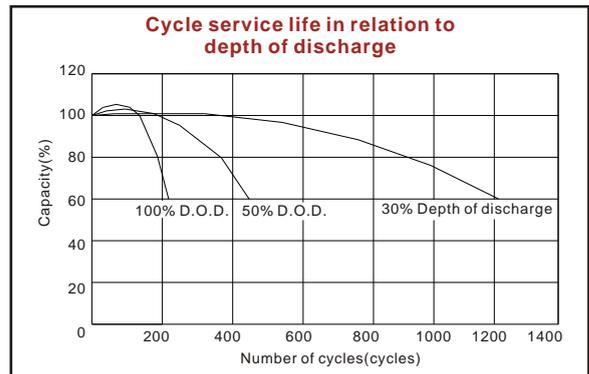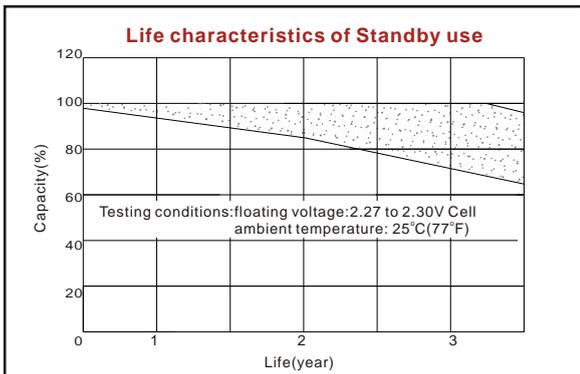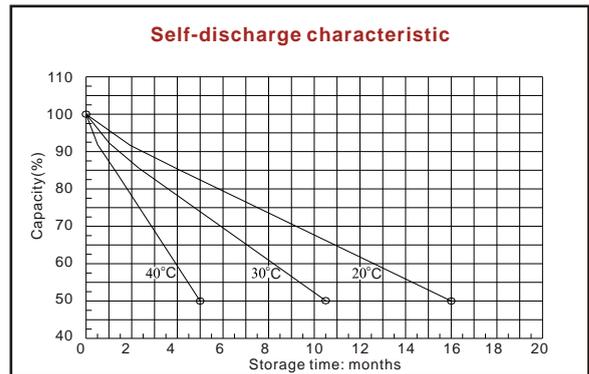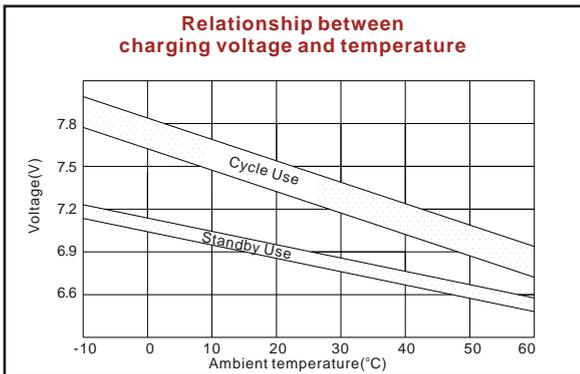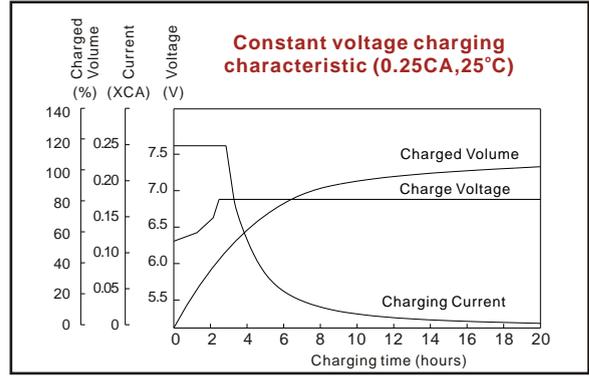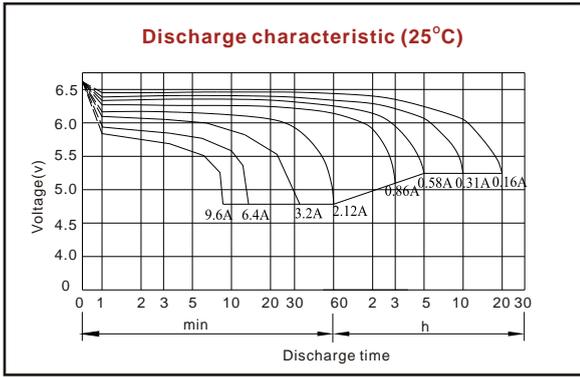

ISO9001:2000

MH25860

G4M19906-9202-E-16

[www.vision-batt.com](http://www.vision-batt.com)

**Shenzhen Center Power Tech. Co., Ltd.**  
 RM 1801, 18/F, Cangsong Bldg., Terra 6 Rd, Chegongmiao, Futian District, Shenzhen 518040 China  
 Tel: (+86-755) 8343 5688 Fax: (+86-755) 8384 9585 E-mail: sales@vision-batt.com