

# CP645H 6V 4.5Ah(20hr)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

## Battery Construction



Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

## Dimensions and Weight

Length(mm / inch).....70 / 2.76  
 Width(mm / inch).....47 / 1.85  
 Height(mm / inch).....101 / 3.98  
 Total Height(mm / inch).....107 / 4.21  
 Approx. Weight(Kg / lbs).....0.85 / 1.87

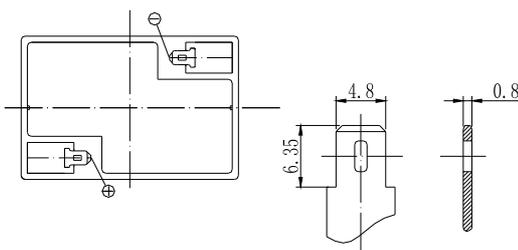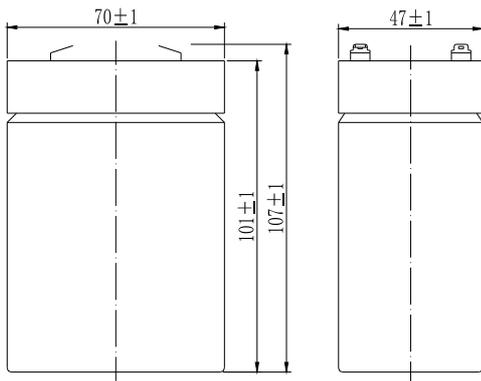

## Performance Characteristics









Nominal Voltage .....6V  
 Number of cell .....3  
 Design Life .....3~5 years  
 Nominal Capacity 77°F(25°C)  
 20 hour rate (0.225A, 5.25V)..... 4.5Ah  
 10 hour rate (0.45A, 5.25V)..... 4.5Ah  
 5 hour rate (0.79A, 5.25V)..... 3.95Ah  
 1 hour rate (3.37A, 4.8V) ..... 3.37Ah  
 Internal Resistance  
 Fully Charged battery 77°F(25°C)..... 20mOhms  
 Self-Discharge  
 3% of capacity declined per month at 20°C(average)  
 Operating Temperature Range  
 Discharge .....-20~60°C  
 Charge .....-10~60°C  
 Storage .....-20~60°C  
 Max. Discharge Current 77°F(25°C) .....67.5A(5s)  
 Short Circuit Current .....225A  
 Charge Methods: Constant Voltage Charge 77°F(25°C)  
 Cycle use ..... 7.25-7.45V  
 Maximum charging current ..... 1.8A  
 Temperature compensation .....-15mV/°C  
 Standby use ..... 6.8-6.9V  
 Temperature compensation .....-10mV/°C

## Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	17.6	14.3	9.90	5.28	3.37	1.37	0.86	0.48	0.235
1.65V	16.7	13.6	9.46	5.07	3.25	1.33	0.84	0.47	0.231
1.70V	15.7	12.9	9.01	4.85	3.12	1.28	0.81	0.46	0.227
1.75V	14.8	12.2	8.54	4.85	2.98	1.23	0.79	0.45	0.225
1.80V	13.8	11.5	8.06	4.37	2.84	1.17	0.76	0.44	0.223

## Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	33.3	24.0	18.7	11.00	8.33	6.67	3.91	2.59	1.73
1.65V	31.3	22.6	17.7	10.50	7.95	6.39	3.80	2.53	1.70
1.70V	29.2	21.2	16.6	9.89	7.55	6.09	3.67	2.46	1.67
1.75V	27.2	19.8	15.6	9.31	7.14	5.79	3.52	2.39	1.63
1.80V	25.2	18.4	14.6	8.73	6.73	5.48	3.37	2.31	1.59

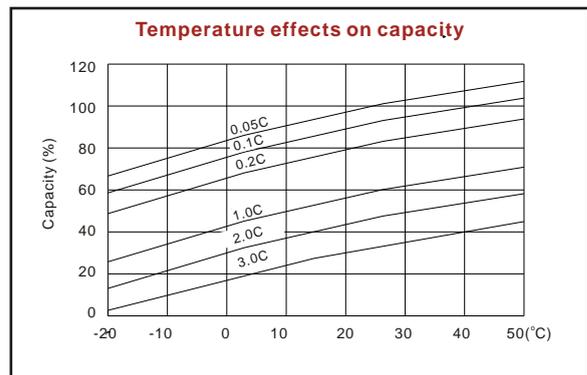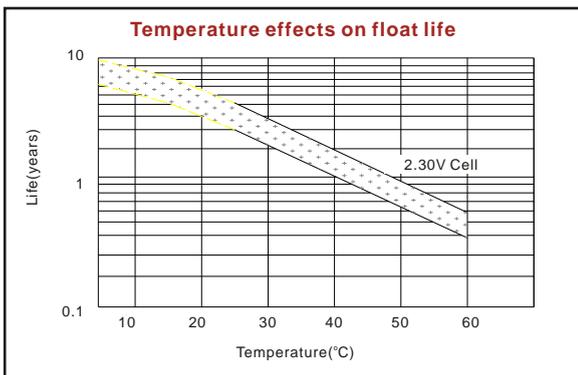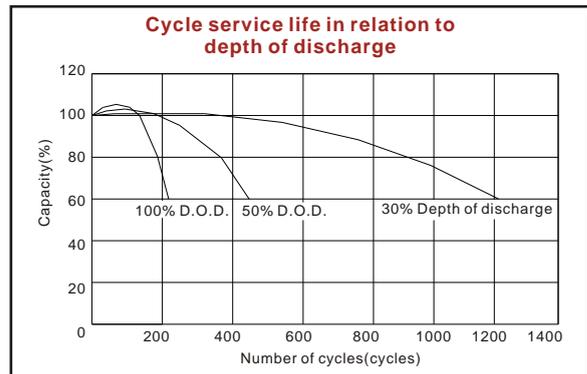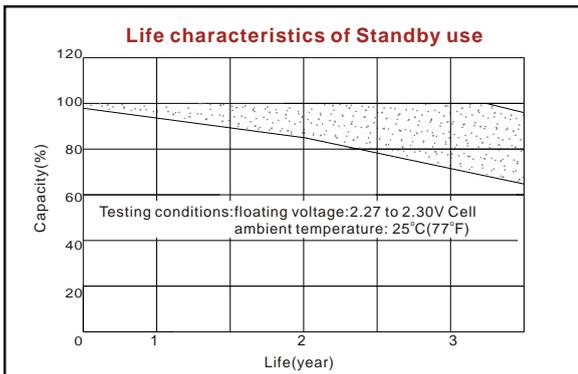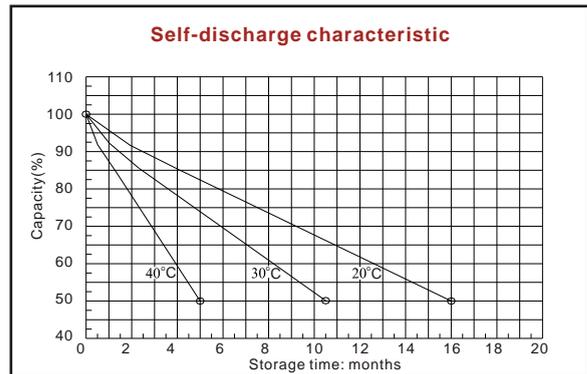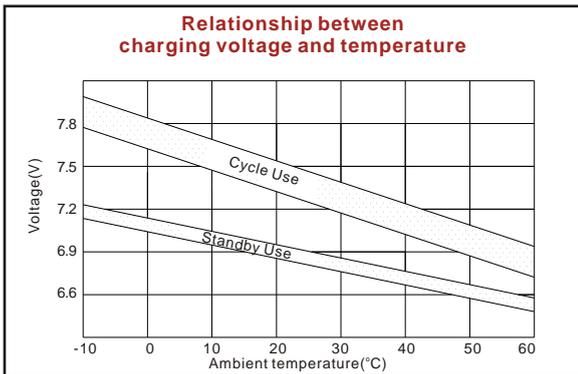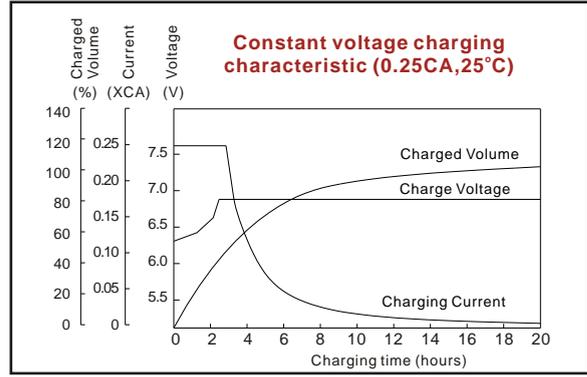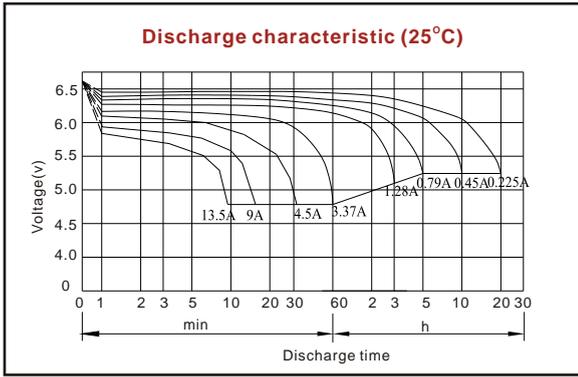

ISO9001:2000

MH25860

CE ETS EMC  
G4M19906-9202-E-16

**Shenzhen Center Power Tech. Co., Ltd.**  
 RM 1801, 18/F, Cangsong Bldg., Terra 6 Rd, Chegongmiao, Futian District, Shenzhen 518040 China  
 Tel: (+86-755) 8343 5688 Fax: (+86-755) 8384 9585 E-mail: sales@vision-batt.com

[www.vision-batt.com](http://www.vision-batt.com)